


Instructions for Blade Assembly Replacement for the Vita-Mix Super Blender

Removing the Retainer Nut under the Jug

Turn the jug upside down and insert a long screwdriver between the retainer nut wall and the drive spline. (see diagram below). Rotate the screwdriver anti-clockwise. Once the retainer nut is loosened you can unscrew it by hand to remove it.

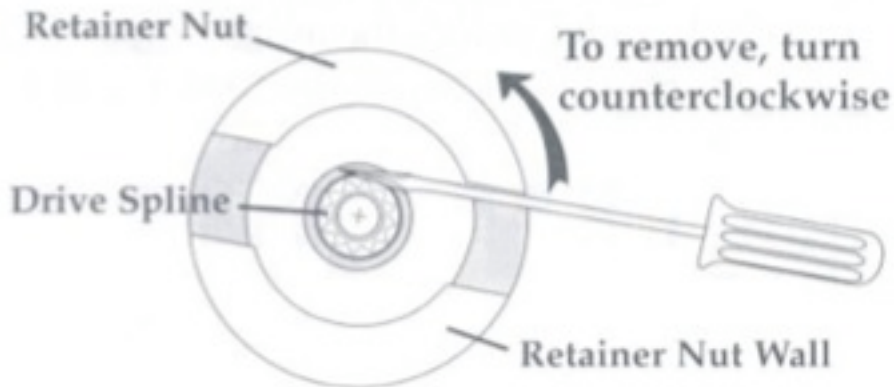

Removing the blade Assembly

The blade assembly can easily be lifted out of the jug once the retainer nut has been removed. *Be careful when removing the blade assembly as the blade is sharp.*



Replacing the Blade Assembly

Put the Blade assembly through the hole at the bottom of the jug. While holding the blade assembly in place turn the jug upside down and screw the retainer nut onto the blade assembly by hand.

Insert a screwdriver between the drive spline and the retainer nut wall and turn clockwise until it stops.

Important Note: If it is not tight enough the jug noise will increase when operating.

Do Not over-tighten as this can cause the jug to crack